




### Using E-Containerlock on ISO containers

Guardfreight has taken great care in designing the E-Containerlock to ensure that when fitted it remains within the overall dimensions of an ISO shipping container.



When fitted to the locking gear the E-Containerlock extends outwards by a maximum of 54mm from the centre of the door seal. By comparison a box manufacturer fitted 'lock box' extends to 57mm whilst the seal retainer catch can extend to 58mm.

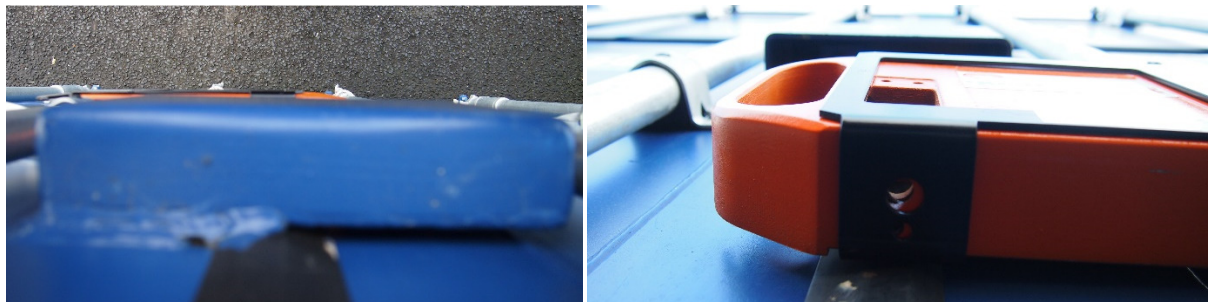

This means that the E-Containerlock does not impact upon the normal handling operations for intermodal shipping containers.

The E-Containerlock when fitted is held rigidly in place and is not able to move freely and move outwards from the face of the door causing interference when loaded with other containers.

E-Containerlock cannot be incorrectly fitted to the container so fitting always ensures the correct clearances.

Fitting of the E-Containerlock does not cause any damage to any part of the container door or locking gear or any other container fittings.

